


## Features



- Data rate: 100G
- Operation temperature: 0~70°C/-40~85°C
- RoSH-6 compliance
- LC receptacle
- Mechanical design suitable for QSFP application

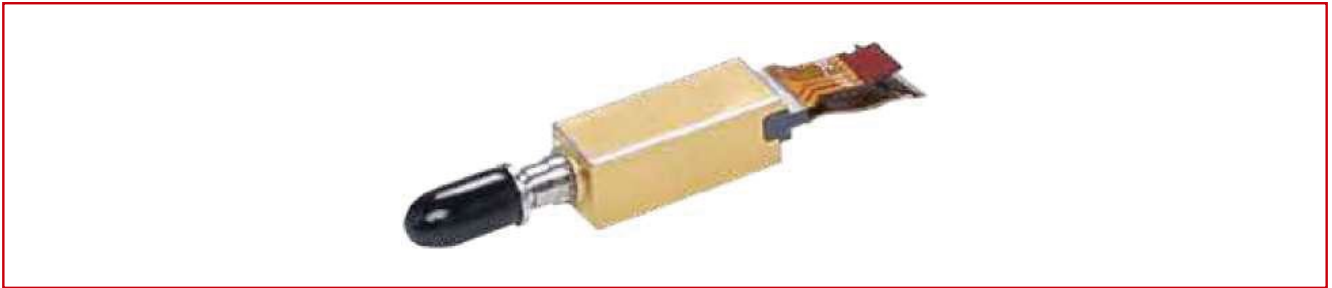

## Standard Parts

| No. | Name              | Model    | Rate  | Temperature (°C) | Wavelength          | Interface | Stitching | Chip type |
|-----|-------------------|----------|-------|------------------|---------------------|-----------|-----------|-----------|
| 1   | 100G LR4 BOX TOSA | ATLFL4TM | 4*25G | 0~70°C/-40~85°C  | 1295\1300\1305\1310 | LC        | Hermetic  | DFB       |
| 2   | 100G LR4 BOX ROSA | ARLFL4PN | 4*25G | 0~70°C/-40~85°C  | 1260nm~1650nm       | LC        | Hermetic  | PIN       |

## Dimensions and Pinouts

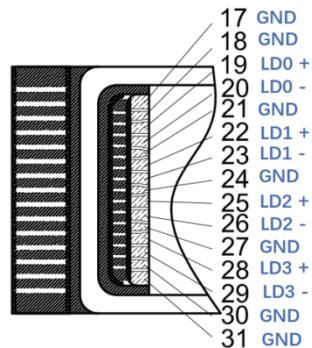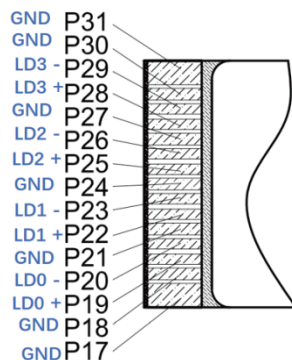

TOSA Pinouts Definition